




Product highlights

- * Stable performance,6-12-18 zones options
- *Two LED lights bar show threats location on human body
- * Extremely high sensitivity to find even tiny threats
- * Ip55 weather proof design
- * Sound and light alarm
- * Operation way : Remote control

Dimensional Drawing

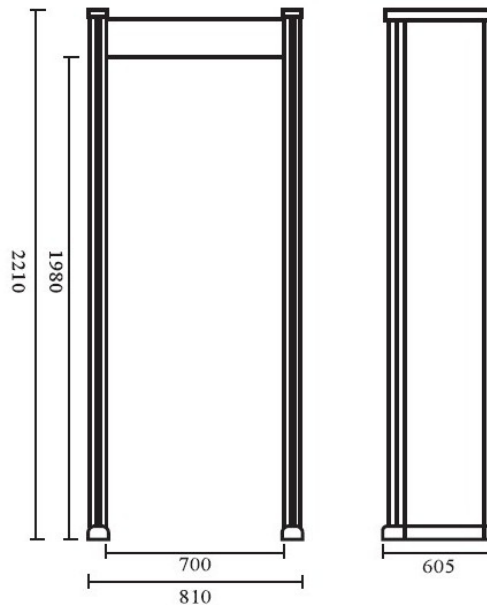

Important Sizes :

Outer frame Size: 2210* 810 * 605mm (L x W x H)

Inner frame Size: 1980* 700mm*605mm(L x W x H)



Product Details

General Specifications

Outer frame	2210mm(H) x810mm(W)x605mm(D)
Inner frame	1980mm(H)x700mm(W)x605mm(D)
Electrical current	AC100V~240V 50/60Hz
Power	10W
Unit weight	70KG
Signal Frequency	7000-8999Hz(adjustable)
Work environment	-20C to +45C
Sensitivity adjustable	Level 0-299
Alarm	Sound and light
Max distance	0.3m at low sensitivity;0.5m at high sensitivity

Configuration

Remote control transmitter	Metal-detect-door-mainbd,rev120+remote control receiver
Master control board	White,
Light bar	Long bar, Metal-detect-door -Ledbd,V040 Short bar, Metal-detect-doo-Ledbd,V010
Digital display board	Minni-a door oanel board, REV040
Speaker	Loudspeaker,8Ω 2W,Black,75mmx32mmx27mm

Software

Operation way	Remote control only
Seansibility	With the highest sensibility, it can detect the metal Article as small as the clip. With the range of 0-100, it can be adjusted the Sensibility easily, pre-set the weight, volume, size and location in respect of the metal Articles and eliminate the false alarming for the coin, key, jewelry, leather belt button, etc.
Infrared counting	The intelligent counter can calculate the number of the Passenger flow and the times of alarming.
Alarm settings	eight kind of alarm sound
Detecting areas	Allocation of six mutual over-lapping detecting areas, Simultaneous alarming from multi-areas and accurately ascertaining the location Of the metal articles according to the layout of the metal articles.

Operating Environment

Operation temperature/Humidity	5C-40C / 0%-90%(non-condensing)
Storage temperature/Humidity	-20C-55C / 0%-98%(non-condensing)
Operation Power	220VAC(±10%) 50±3Hz (Optional: 100VAC,110VAC,120VAC,200VAC)

SAFEGWAY INSPECTION SYSTEM LIMITED

First Factory: BuildingA, QiFeng Digital Park, BaiNiKeng, PingHu Street, LongGang, Shenzhen, China

Second Factory: Building B, ShengLongXing Industrial Park, LongTeng Road, PingDi Street, LongGang, Shenzhen, China

Tel: +86 - 755-6195 5772 / Fax: +86 - 755-6195 5788

Mobile&Whatsapp: + 86- 136 7021 3490 Skype: sophia.xiong8105

Email: sophia@cargovehicleinspection.com

Website: www.cargovehicleinspection.com

